







G-BH1

Performance curve for Vacuum pump

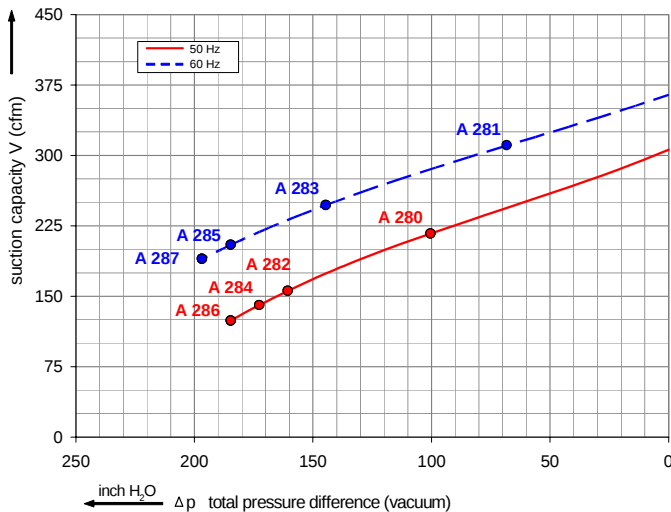

2BH1 810

Performance curve for Compressor

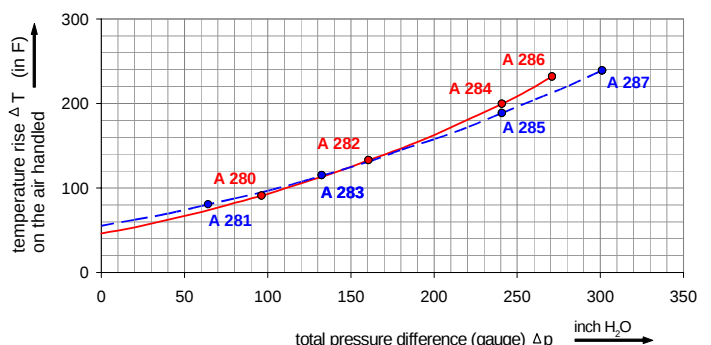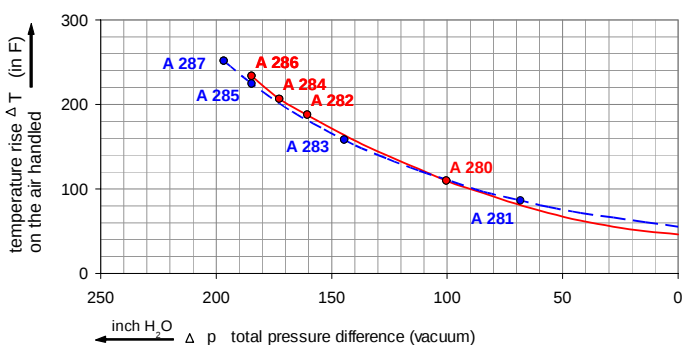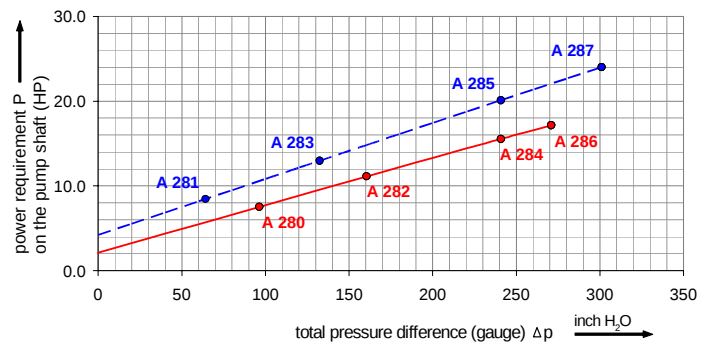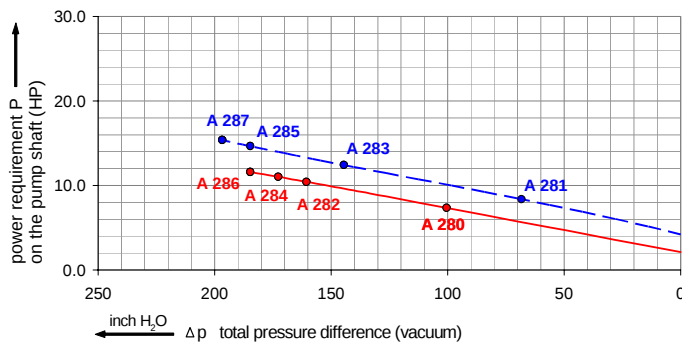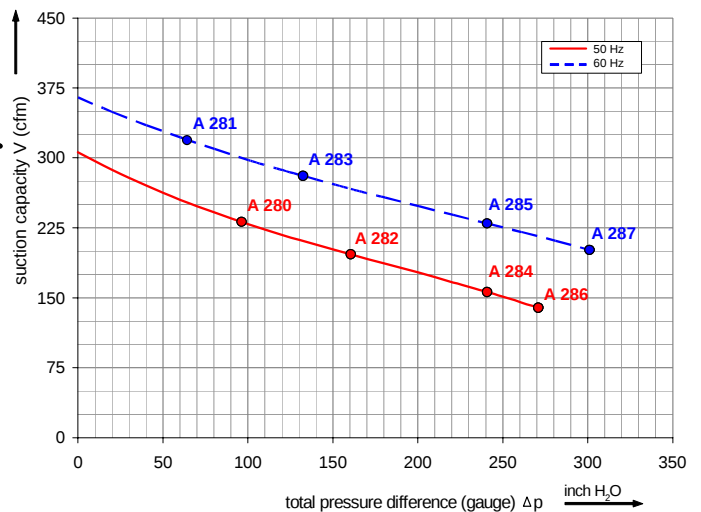

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 401.53 inch H₂O with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 77 F. For other conditions please confer with us.

Each G-BH1 type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA. Blowers with ATEX 94/9 EG are available, too.


Selection and ordering data

Type 2BH1 810

Curve No.	Order No.	Fre- quency	Rated power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	HP	V	A	Vacuum inch H2O	Compressor inch H2O	dB(A)	lbs

3- 50/60 Hz IP55 isolation material class F 1)

A 280	2BH1810-7HH16	50	7.37	200D ... 240D	345Y ... 415Y	23.0D	13.3Y	-100	96	74	359
A 281	2BH1810-7HH16	60	8.45	220D ... 275D	380Y ... 480Y	23.0D	13.3Y	-68	64	78	359
A 282	2BH1810-7HH26	50	10.05	200D ... 240D	345Y ... 415Y	29.0D	16.7Y	-161	161	74	372
A 283	2BH1810-7HH26	60	11.53	220D ... 275D	380Y ... 480Y	30.0D	17.3Y	-145	132	78	372
A 284	2BH1810-7HH36	50	14.75	200D ... 240D	345Y ... 415Y	48.5D	28.0Y	-173	241	74	452
A 285	2BH1810-7HH36	60	16.89	220D ... 275D	380Y ... 480Y	50.2D	29.0Y	-185	241	78	452
A 286	2BH1810-7HH46	50	20.11	200D ... 240D	345Y ... 415Y	56.5D	32.5Y	-185	271	74	487
A 287	2BH1810-7HH46	60	23.19	220D ... 275D	380Y ... 480Y	60.0D	34.5Y	-197	301	78	487

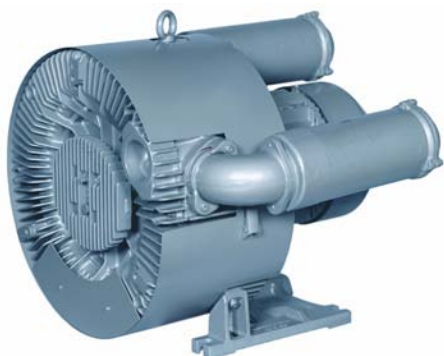

Other voltage ranges

2BH1810-7H ☐ . ☐

50Hz	60Hz	
3~		↑ ↑
185...225 V D / 320...390 V Y	200...240 V D / 345...415 V Y	H 1
200...240 V D / 345...415 V Y	220...275 V D / 380...480 V Y	H 6
345...415 V D	380...480 V D	H 7
500 V D	575 V D	C 5

Machines according to the ATEX norm 94/4 EG are available for the whole performance range.

Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.

Further voltage range on request; please quote in plain text.

All G-BH1 achieve the standards and norms of the low voltage directive 72/23/EWG, rotating electrotechnical motor EN 60034-1-34, electromagnetic compatibility (EMC) DIN EN 61000-3/-6/-4.

¹⁾ For standard UL for ELECTRIC FANS UL 507 and CSA 22.2 No. 13 for Fans and Ventilators (Certificate Number E225239).

²⁾ Relief-valve are available for limiting differential pressure.

³⁾ Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 3.28 ft. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (vacuum pump) / suction side (compressor), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

For all three phase machines which designed according to the UL and CSA norm (UL 507 and CSA 22.2 No. 100) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

**Gardner
Denver**

Elmo Rietschle is a brand of the
Gardner Denver Blower Division

info@de.gardnerdenver.com
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstr. 58
79650 Schopfheim · Germany

Tel. +49 7622 392-0
Fax +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestr. 26
97616 Bad Neustadt · Germany

Tel. +49 9771 6888-0
Fax +49 9771 6888-4000